



A

B

C

D

E

F

A


B

C

D

E

F

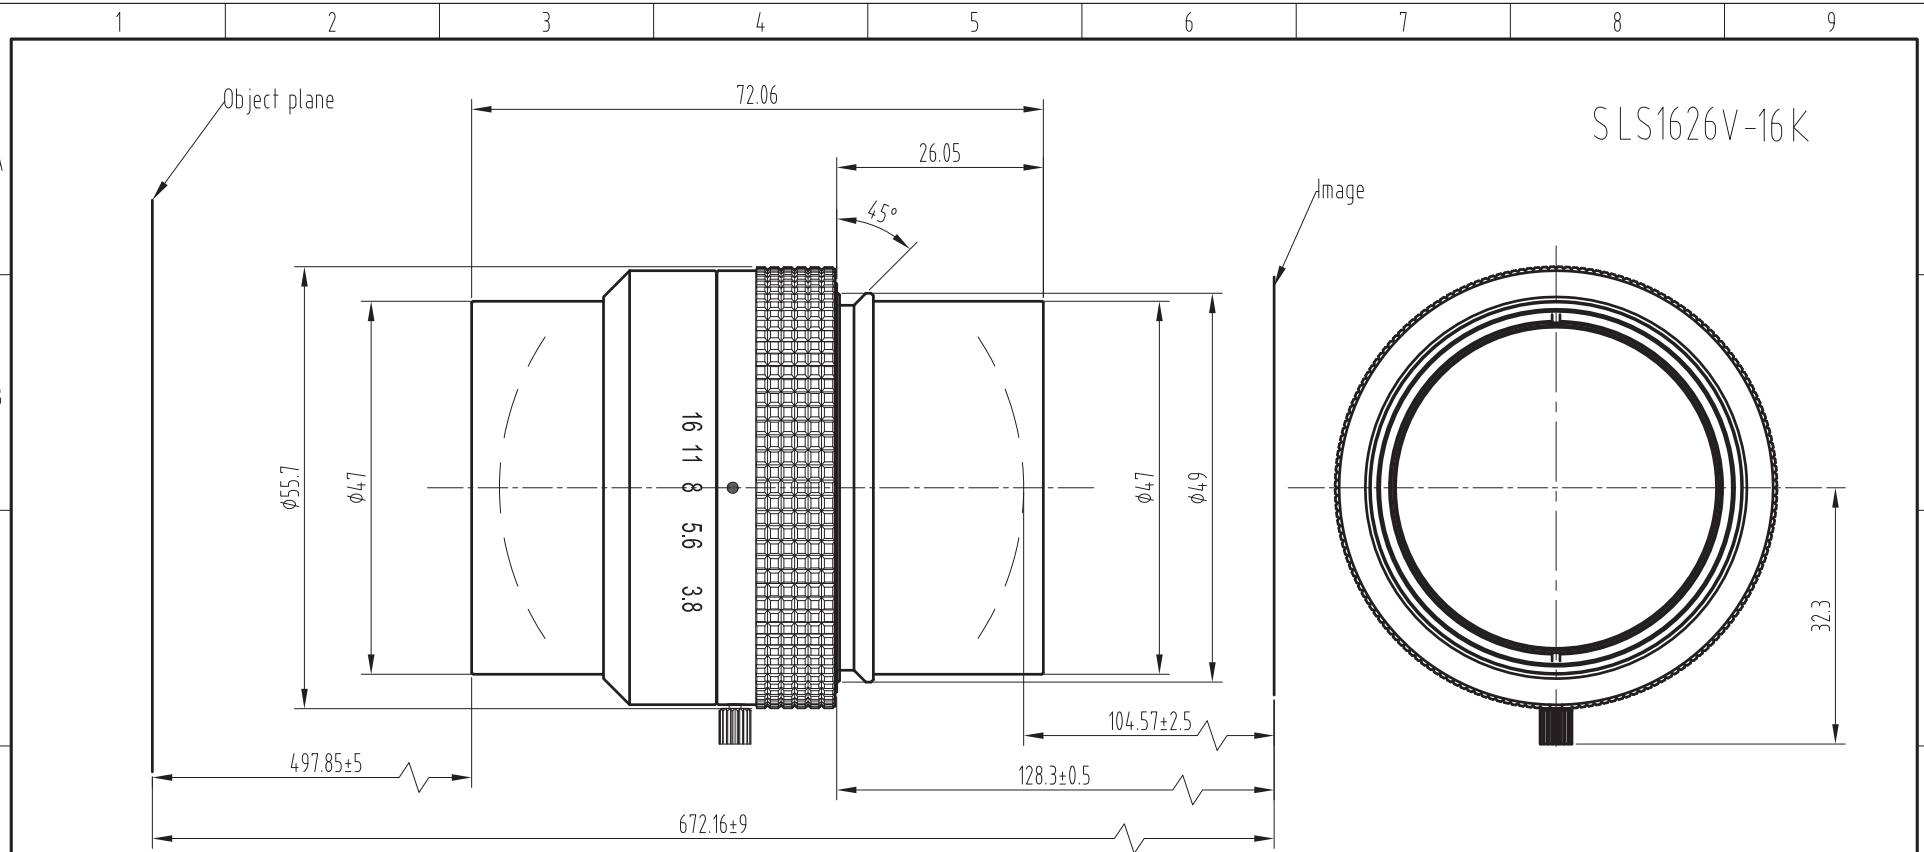

Main Specification			
Magnification	0.23X	0.26X	0.28X
Working Distance	555.5±5	497.85±5	466.6±5
Image Distance	101.14±2.5	104.57±2.5	106.89±2.5
Conjugate Distance	726.28±9	672.16±9	643.08±9
Flange Focal Distance	124.72±0.5	128.3±0.5	130.47±0.5
Max image	ø66		
F/#	4.2		
EFL	114		
FOV	28.6°		
ENP Diameter	27.12		
Distortion	0.01%		
Struccture	8G		
IMAGE QUALITY			
AXIS	ø46.2	ø66	
200lp/mm	160lp/mm	160lp/mm	



					TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE±30' DRAFT ANGLES AREA±0.5°/SIDE				材 料 (环 保)		单 位	比 例
											mm	-
					设 计		2014-07-29	名 称	规格图		页 码	
					校 对						1/1	
		倍率参数变更		2014,07,29	审 核			代 号	SLS1626V-16 K		版 本	
标记	处数	更改文件号	担当	变更日期	批 准						V3	

