


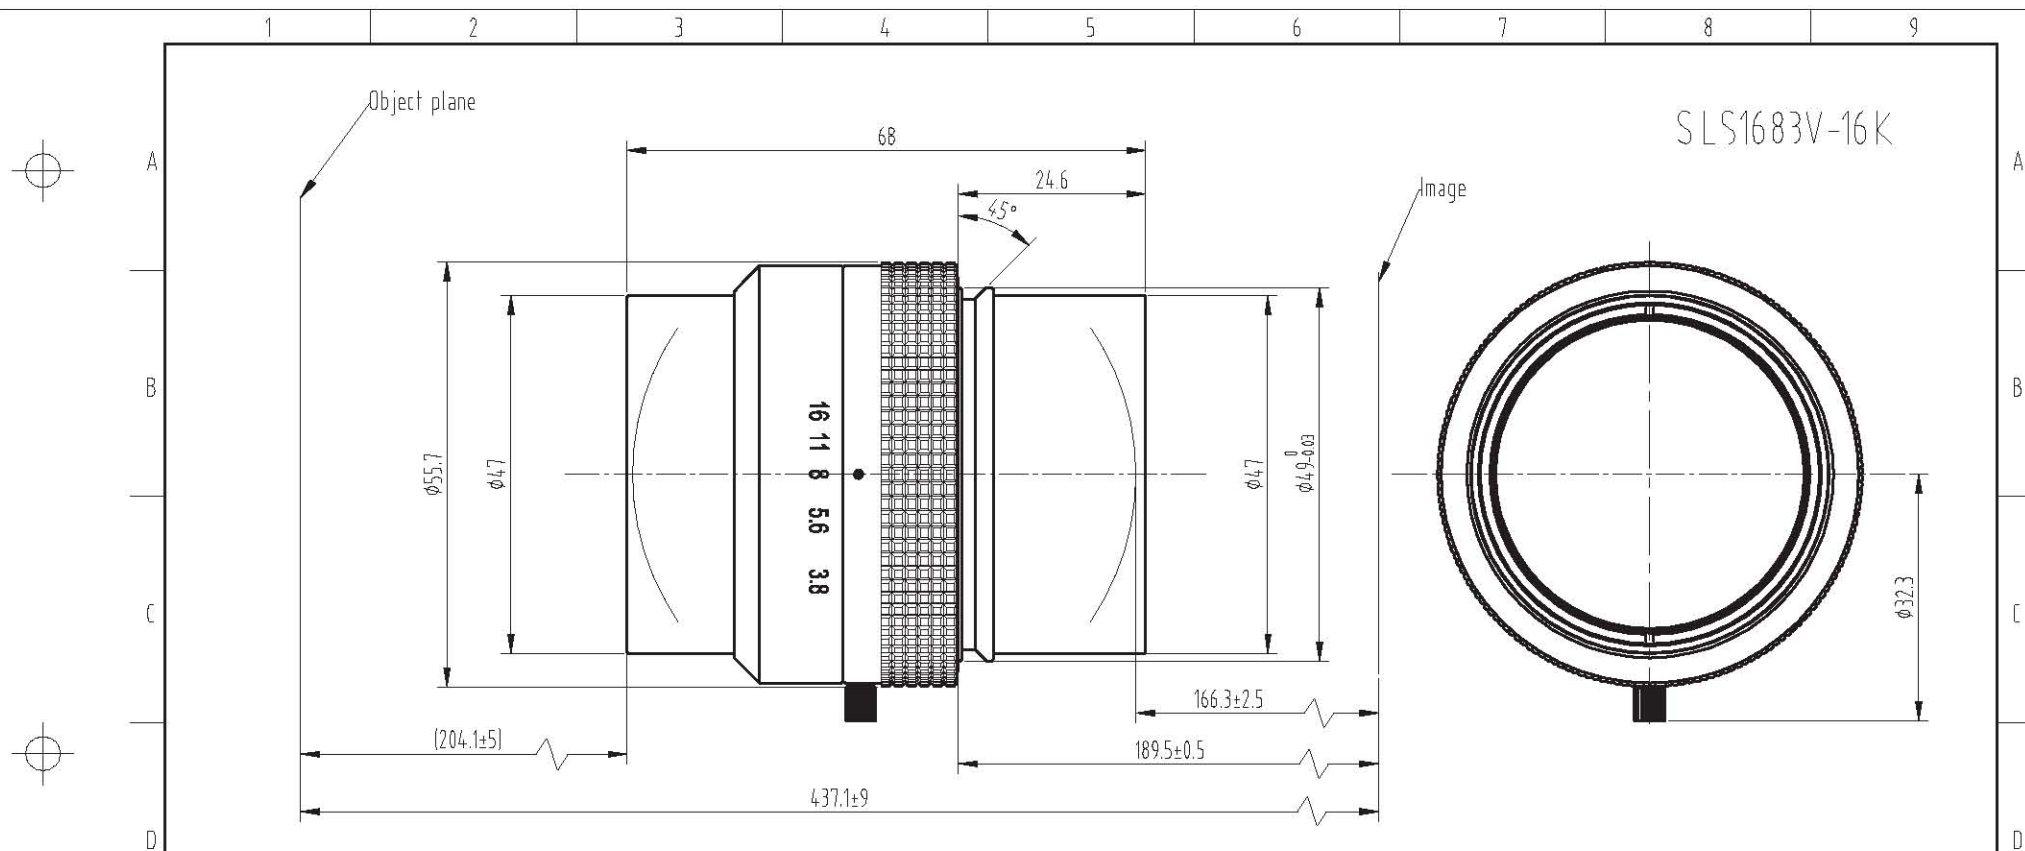

Main Specification			
Magnification	0.75X	0.8387X	0.86X
Working Distance	221±5	204.1±5	201.4±5
Image Distance	156.15±2.5	166.3±2.5	167.86±2.5
Conjugate Distance	443.85±9	437.1±9	435.96±9
Flange Focal Distance	179.35±0.5	189.5±0.5	191.06±0.5
Max image	φ82		
F/#	3.8		
EFL	116		
FOV(DBJ)	28°		
Distortion	0.008%		
Structure	8G		
IMAGE QUALITY			
AXIS	φ46.2	φ82	
200lp/mm	160lp/mm	160lp/mm	

Image space NA	0.0712
Object space NA	0.0597
Entrance pupil diameter	30.17
Entrance pupil position	47.286
Exit pupil diameter	29.97
Exit pupil position	-209.8

TOLERANCE:			材料(环保)	单位	比例
LINEARITY TOLERANCES ±0.05					
ANGULAR TOLERANCES ARE±30'					
DRAFT ANGLES AREA±0.5°/SIDE				mm	1:1

设计		2014-12-08	名称	规格图	页码
校对					1/1
审核			代号	SLS1683V-16K	版本
标记	处数	更改文件号			担当