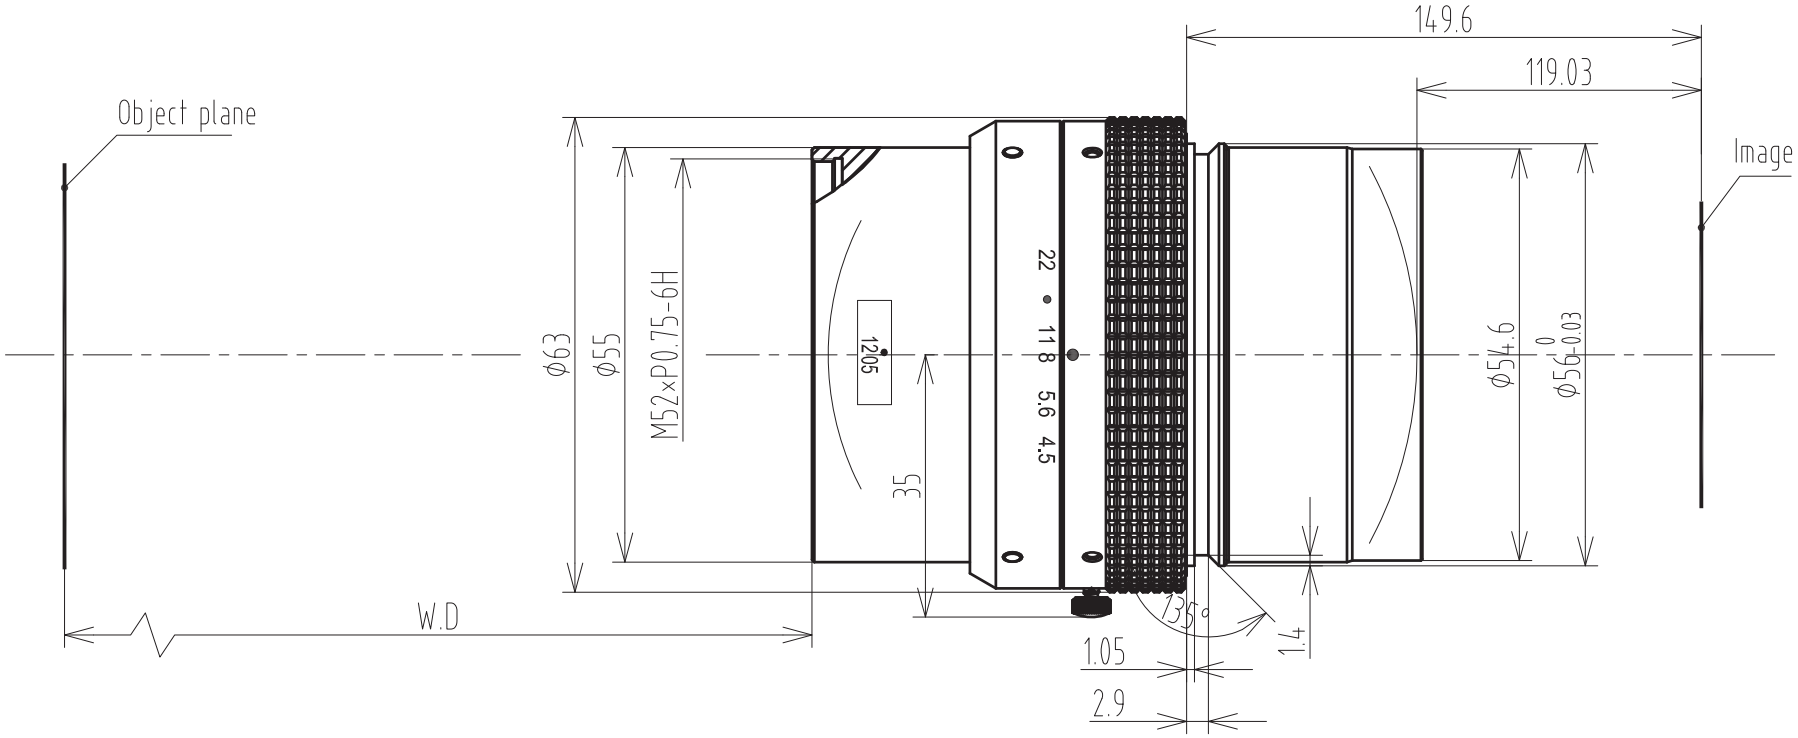

Main Specification			
Magnification	0.45X	0.5X	0.6X
Working Distance	318.2±5	291.7±5	251.9±5
Image Distance	113.17±2.5	119.03±2.5	131.05±2.5
Conjugate Distance	511.61±9	491±9	463.19±9
Flange Focal Distance	143.8	149.6	161.6
Max image	φ62		
F/#	4.5		
EFL	116		
FOV	29°		
ENP Diameter	24.1		
Distortion	<0.01%		
IMAGE QUALITY			
AXIS	φ46.2	φ66	

Image space NA	0.073
Object space NA	0.036
Entrance pupil diameter	24.1
Entrance pupil position	37.88
Exit pupil diameter	30.93
Exit pupil position	-212.57

SLS1605V-12K

注：

Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

标记	处数	更改文件号	担当	变更日期

TOLERANCE:
. LINEARITY TOLERANCES ±0.05
. ANGULAR TOLERANCES ARE±30'
. DRAFT ANGLES AREA±0.5°/SIDE

三角法

设计		2017-03-30	名称	规格图	页码 1/1
校对					
审核			代号	SLS1605V-12K	版本 V0
批准					

材料(环保)	单位	比例
	mm	1:1

A4