


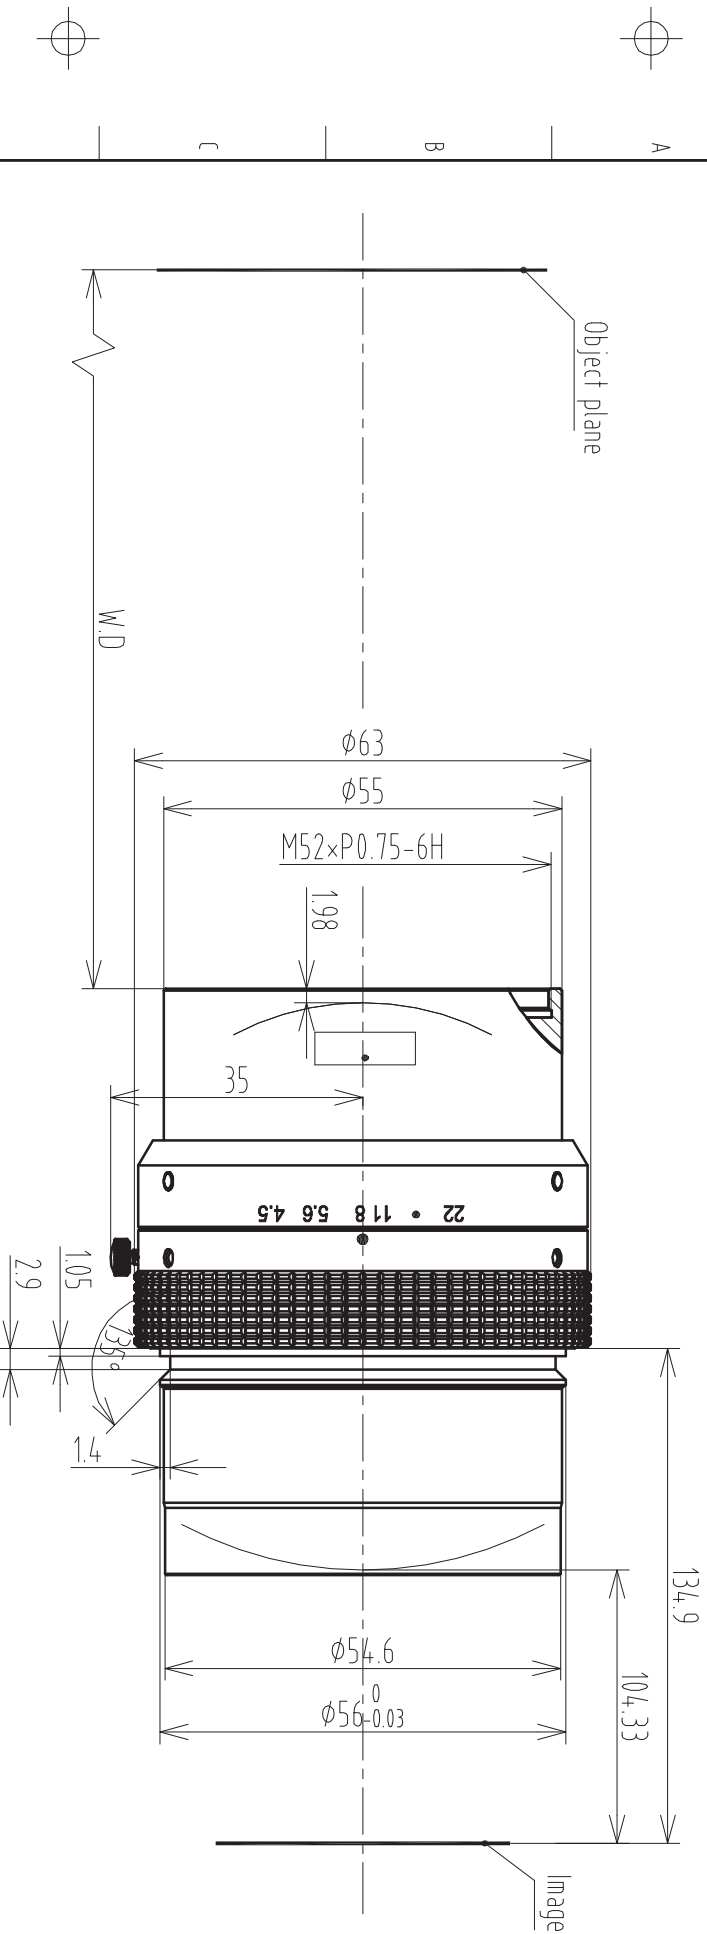

D

Main Specification

Magnification	0.29X	0.33X	0.4X
Working Distance	465±5	415.1±5	351.2±5
Image Distance	99.55±2.5	104.33±2.5	112.78±2.5
Conjugate Distance	644.85±9	599.7±9	544.58±9
Flange Focal Distance	130.1	134.9	143.4
Max image	$\phi 62$		
F/#	4.5		
EFL	116		
FOV	29°		
ENP Diameter	23.37		
Distortion	<0.005%		

Image space NA	0.078
Object space NA	0.026
Entrance pupil diameter	23.37
Entrance pupil position	36.3
Exit pupil diameter	30.93
Exit pupil position	-197.88

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

SLS1603V-12K

TOLERANCE:
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE



材料(环保)

单位

比例

mm

1:1

名称

规格图

页码

1/1

版本

V0

IMAGE QUALITY

AXIS	$\phi 46.2$	$\phi 66$
------	-------------	-----------

标记	处数	更改文件号	担当	变更日期	批准
----	----	-------	----	------	----

1

2

3

4

5

6

7

8

9

A4