


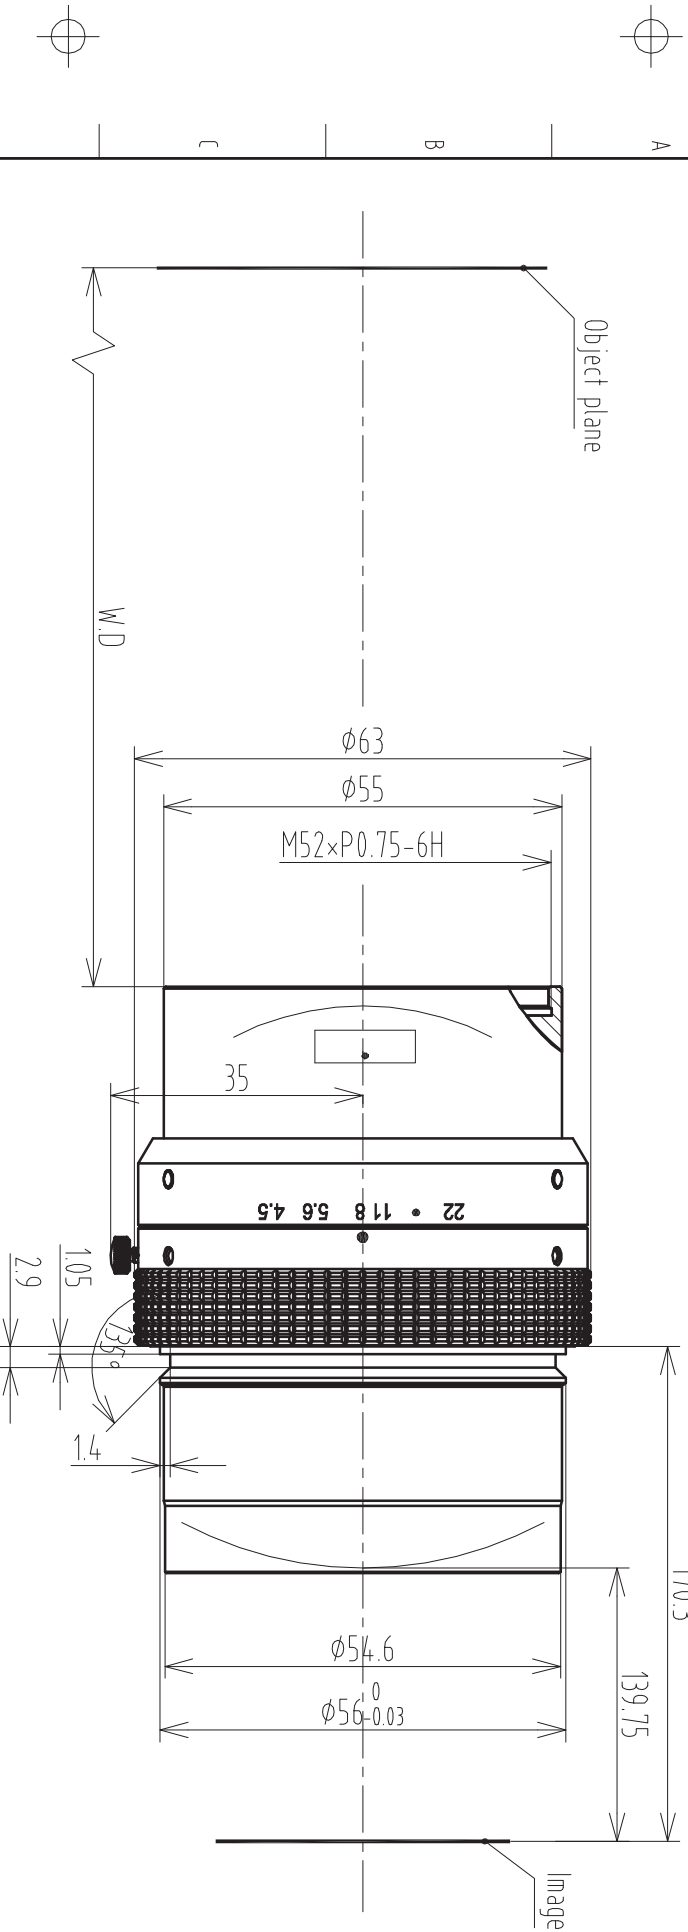

Main Specification

Magnification	0.7X	0.75X	0.85X
Working Distance	220.9±5	209.8±5	191.4±5
Image Distance	133.96±2.5	139.75±2.5	151.58±2.5
Conjugate Distance	435.1±9	429.85±9	423.2±9
Flange Focal Distance	164.5	170.3	182.2
Max image	$\phi 62$		
F/#	4.5		
EFL	116		
FOV	29°		
ENP Diameter	25		
Distortion	<0.005%		

Image space NA	0.066
Object space NA	0.05
Entrance pupil diameter	25
Entrance pupil position	39.27
Exit pupil diameter	30.93
Exit pupil position	-233.29

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

SLS1607V-12K

TOLERANCE:
LINEARITY TOLERANCES ± 0.05
ANGULAR TOLERANCES ARE $\pm 30'$
DRAFT ANGLES AREA $\pm 0.5^\circ$ /SIDE



材料(环保)

单位
mm

规格图

页码
1/1

AXIS

IMAGE QUALITY

$\phi 4.6.2$

$\phi 66$

标记	处数	更改文件号	担当	变更日期	批准
----	----	-------	----	------	----

1

2

3

4

5

6

7

8

9

A4