


S11MZ28128PIR-12M (28-128mm 1.1" 12MP C P-iris)

1. 6K Megapixel high resolution 1200 万像素高清晰度
2. 1.1" sensor 大靶面 1.1 英寸
3. P-iris P-iris
4. Application: Surveillance,ITS, Highway 国界、山河、高速公路等

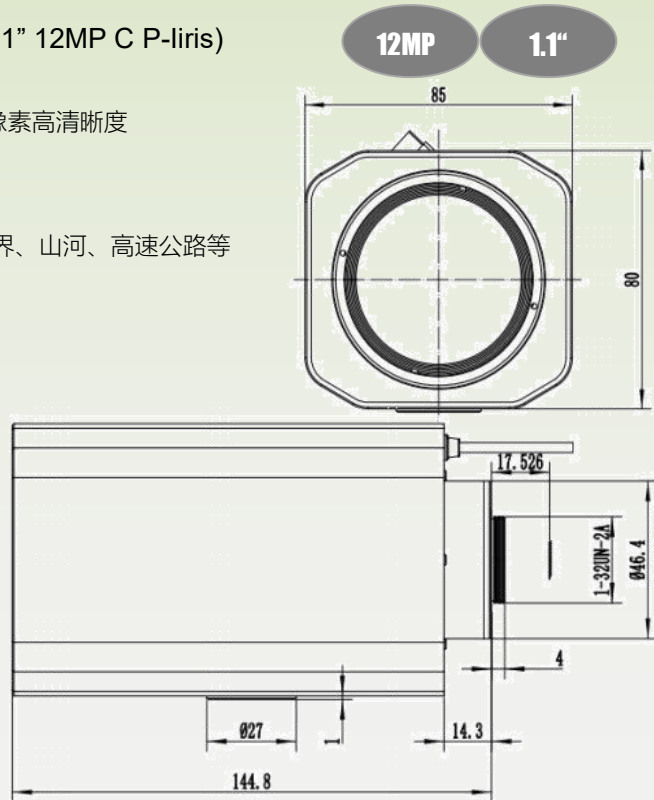

Model 型号		S11MZ28128PIR-12M
Resolution 像素		12 Megapixel
IR Corrected 日夜		IR
Format 靶面		1.1"
Focal Length 焦距		28-128mm
Aperture (Close/360) 光圈		F2.5 P-Iris
Angle of View (°) 视场角	1.1" IMX428	W: 32.3*26.5*18.1 T: 8.5*7.1*4.9
	1" IMX305	W: 29.5*25.9*13.6 T: 7.8*6.9*3.7
	1/1.2" IMX485	W: 23.5*20.4*11.4 T: 6.3*5.5*3.1
M.O.D 最近物距		3m(W) ~ 5m (T)
Distortion 畸变		-4.3%-1.7%@1.1"; -2.1%-0.9%@1/1.2"
Relative illumination 照度		42%@Φ12.8mm (W) ; 40% Φ12.8mm (T)
C.R.A 主光线夹角		1.9° Tele;3.0° Wide
Dimension 尺寸		Φ80*85*144.8mm
B.F.L 光学后焦		12.02mm
M.F.L 机械后焦		13.526mm
Mount 接口		C
Weight 重量		500g
Marks 备注		45% Wide Φ8.8;40% Tele Φ8.8
Character 特性		Coating 400~900nm;-30° ~ +70°